


RoHS



**KFWSX Series
Right Angle
Surface Mount
IEEE 1394 Socket**

Features

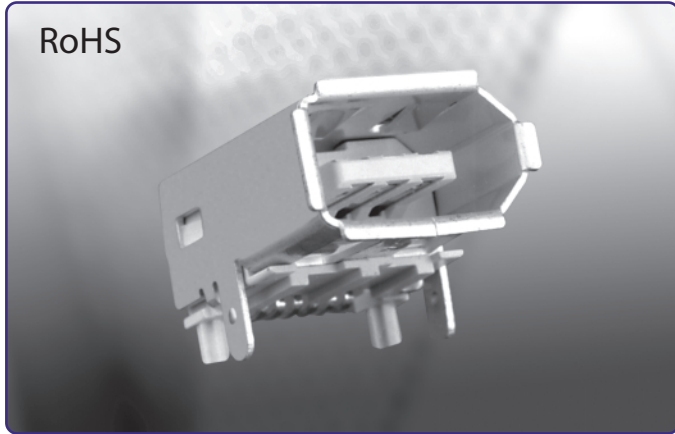

- Supports Hot Plugging
- Rated 400 Mbps
- Surface Mount Technology for Electrical Connections
- Lead Plated Solder Tails for Excellent Solderability
- Contact Area with Gold Plating
- CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish

Shell: Copper Alloy, Nickel Plating
 Insulator: High Temperature Thermoplastic, UL94V-0 Rated
 Contacts: Copper Alloy
 Plating: Standard - 30µ" Gold over Nickel on Contact Area
 Tin Over Nickel on Solderails



Mechanical Characteristics

Durability: 1500 Cycles Min.
 Insertion Force: 3.6kg Max.
 Extraction Force: 1.0kg Min.

Electrical Characteristics

Voltage Rating: 30V AC
 Contact Current Rating: 1 Amp DC Max. Per Contact Not To Exceed 30°C Temp. Rise
 Dielectric Withstanding Voltage: 750 V AC for 1 Minute
 Capacitance: 2pF Max.
 Contact Resistance: Less Than 30 Milliohms per Contact Pair After 1500 Mating Cycles
 Insulation Resistance: Greater than 100 Megohms
 Operating Temperature: 55°C to +85°C

IEEE 1394 CONNECTORS

KFWSX - SMT Series

Ordering Information

KFWSX	-	SMT-100		W	-	30
Series		Style		Color		Plating Option

Series
 KFWSX - Single IEEE 1394 Socket
 Style
 SMT-100 - Right Angle Surface Mount
 Color
 W - White
 B - Black
 Plating
 30 - 30µ" Gold Plating

KFWSX-SMT Series Dimensions

Dimensions in mm

