



DC POWER CONNECTORS: KPJX-CM Series

Snap and Lock Cable Mount

Product Features

Laptop Computers, Power Supplies and Other Portable

Digital Equipment Applications

Snap & Lock Feature Helps to Prevent Accidental Disconnects

3 or 4 Pins Transmit Power, or One Pin Can Be Used For Signal Transmission

For Signal and DC Power Applications

Supplied in a Kit Ready for Assembly

Performance Specifications

Materials and Finish

Inner Shield: Copper Alloy, Nickel Plated

Body: ABS Thermoplastic, UL94HB Rated

Insert: Nylon, UL94V-2 Rated

Contacts: Phosphor Bronze

Electrical Characteristics

Contact Rating

3 Position: Pin 1 and 2, 48V DC at 7.5A Max.,
Pin 3, 48V DC 1.0A Max.

4 Position: 48V DC 7.5A Max. For All Pins.

Insulation Resistance: 50 Megohms Min. at 250V DC

Dielectric Withstanding Voltage: 500V AC For 1 Minute

Contact Resistance: 30 milliohms Max.

Mechanical Characteristics:

Durability Test: 1000 Cycles

Suggested Wire Awg. :

#20 Max. For Power Wires,

#26 Max. for Signal Wire.

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

<input type="text"/>	-	<input type="text"/>	<input type="text"/>
Series		No. of Contacts	Contact Type

Series

KPJX-CM - Receptable, Cable Mount

Number of Contacts

3 Pin

4 Pin

Contact Type


S - Socket

Recommended to be used with Kycon **KPPX Series Plugs**


Contact Kycon for Other Options

KPJX-CM Series

Dimensions in mm

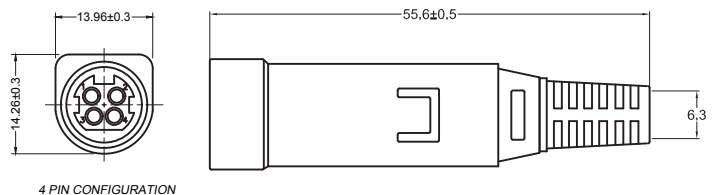

4 PIN CONFIGURATION



3 PIN CONFIGURATION

[Click here for our assembly videos](#)