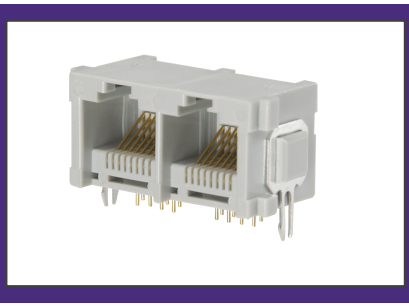

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

GAX-2-62

Part Number Builder

GAX	–	2	62	
Series		No. of Ports	No. of Positions	Plating Option

MODULAR JACKS AND PLUGS: GAX Series

Right Angle Ganged Jack

Product Features

Available in 6 and 8 Position Housings
Right Angle Version
Ribbed Pin Guides
Metal Locking Brackets
CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish
Housing Material
PBT Thermoplastic, UL 94V-0 Rated, Color: Gray
Metal Peg:
Phosphor Bronze, Tin Plated
Contact Material
Phosphor Bronze
Contact Plating Options
Standard
0.0001" Nickel Underplating, Gold Flash Plated overall
50
0.0001" Nickel Underplating, 0.000050" Gold Plated overall to Comply with FCC Requirements Under No. 47 C.F.R. Part 68, Subpart F

Electrical Characteristics

Current Rating
1.5A
Voltage Rating
125V DC
Insulation Resistance
500 Megohms Min.
Dielectric Withstanding Voltage
1000V AC RMS for 1 Minute
Contact Resistance
20 milliohms Max.

Series
GAX - Right Angle PCB Mount

Number of Ports
2 - 2 Port
3 - 3 Port
4 - 4 Port
5 - 5 Port
6 - 6 Port
7 - 7 Port
8 - 8 Port

Number of Positions / Contacts
62 - 6 Positions / 2 Contacts
64 - 6 Positions / 4 Contacts
66 - 6 Positions / 6 Contacts

Contact Kycon for Other Options
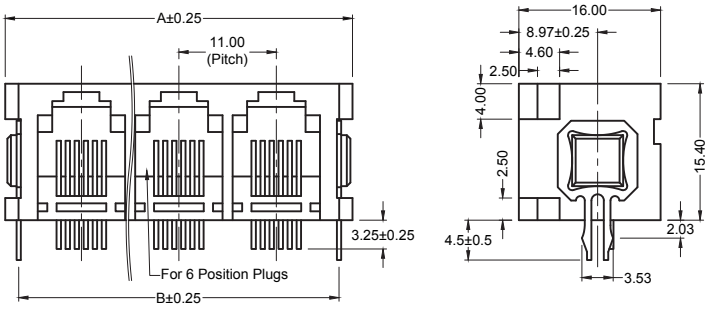
GAX Series
Dimensions in mm