



Cables and Adapters: KLAPX Series RJ45, Panel-Mount Adaptor

Product Features

Fully Shielded in Stainless Steel
Snaps Into a Panel or Bulkhead.
Connects Finished Patch Cords to Finished Patch Cords.
(Male Plugs to Male Plugs.)
No Crimping or Soldering Required.
Compatible With CAT6 and CAT6A Cables.

Performance Specifications

Materials and Finish

Housing Material

Engineering Thermoplastic, UL 94V-0 Rated,

Contact Material

Phosphor Bronze

50u" Gold Over Nickel Plated

Shield Material

Stainless Steel

Electrical Characteristics

Voltage Rating

120V AC RMS.

Current Rating

1.5 A

Contact Resistance

60 MilliOhms Max.

Insulation Resistance

1,000 MegOhms Min. @500 VDC

Dielectric Strength

1,000 VAC RMS 60Hz, 1 Minute.

Mechanical Characteristics

Durability: 750 Mate Cycles Min.

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

	-		-		-		-		-	
Series		Product Type		Shielded		Type		Plating		Performance rating

Series

KLAPX - Panel-Mount Adaptor Series

Product Type

CPLR - Coupler

Shielding Option

S - Shielded

Size (No. of Contacts)

88 - 8P8C 8 Positions, 8 Contacts (RJ45)

Plating

50 - 50u" Gold

Performance rating


C6 - CAT6

C6A - CAT6A

Contact Kycon For Other Options

KLAPX Series

KLAPX-CPLR-S-88-50-C6

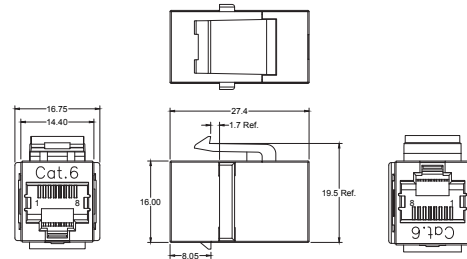

KLAPX-CPLR-S-88-50-C6A

