

**Materials and Finish**

Housing Material-  
PBT Thermoplastic  
UL 94V-0 Rated

Contact Material-  
Phosphor Bronze

Contact Plating Options-

Standard: gold flash over  
nickel on entire contact

15: 15u" gold over  
nickel on entire contact

50: 50u" gold over  
nickel on entire contact to  
comply with FCC Requirements  
under No. 47 C.F.R. Part 68,  
Subpart F

**Electrical Characteristics**

Current Rating-  
1.5 Amps


Voltage Rating-  
125V DC

Insulation Resistance-  
500 Megohms min.

Dielectric Withstanding Voltage-  
1000V rms, 60Hz

Contact Resistance-  
20 milliohms max.

PCB Edge

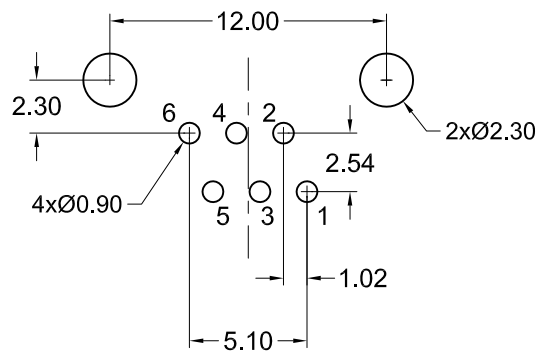

Recommended PCB Layout  
(Bottom View)

Part Number	Contact Area Plating Finish	Color
GLX-N-66M	Gold Flash (standard)	Grey
GLX-N-66M-15	15u" Gold (15 option)	Grey
GLX-N-66M-50	50u" Gold (50 option)	Grey
GLX-N-66M-BLK	Gold Flash (standard)	Black

Tolerances
X.X ± 0.35
X.XX ± 0.25
Unless Stated Otherwise



REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A2	02/27/09	ECO #09-023	S. Vien	H. MA	R. Aguirre	9/16/05
A3	07/30/09	ECO #09-055	S. Vien	H. MA		
A4	05/13/10	ECO #10-025	S. Vien	H. MA		
A5	12/07/11	ECO #11-081	S. Vien	H. MA		
A6	12/12/13	ECO #13-091	D. Gih	H. MA		
A7	06/05/17	Updated Address	H. MA	N/A		

**GLX-N-66M**

Mod. Jack, Rt Ang., PCB Mount, RoHS Compliant

6 Position, 6 Contacts, M Body

